

- 1.5 MHz to 30 MHz frequency coverage
- Compact Size
- 150 Watt (digital, voice and data)
- Land mobile and marine
- Memory tune (100 ms)
- Internal Fit GPS
- ALE 2G/3G compatible
- Mil-STD 810G





The Barrett 4045 (Nato green P/N 4045-00-01) automatic antenna tuner (ATU) is designed for operation in land mobile, marine and base station installations with Barrett transceiver products.

Housed in a fully weatherproof (IP67) enclosure, the 4045 efficiently tunes long wire antennas up to a length of 20 metres, wire loop antennas or whip antennas over a frequency range of 1.5 to 30MHz. Tuning is rapid, typically less than 1.5 seconds from the first time RF is applied, either whilst the operator is talking or when the "Tune" control is activated on the transceiver.

When paired with a Barrett 4000 series HF Transceiver, the 4045 memory tune feature eliminates the need to retune an antenna after a channel change. When returning to a previously tuned channel, the transceiver sets the 4045 with a stored tuning result in less than 100 ms. It is fitted with an internal GPS. This internal unit can be used to provide GPS data as part of a GPS tracking network without the need to install a separate GPS, simplifying the system installation.


The 4045 is supplied as standard with a 6 metre composite RF control cable. A 10 metre RF control cable is available as an optional accessory (P/N 4019-00-05) as in an extension adapter kit (P/N BCA401914).

Designed and manufactured in Australia, the 4045 can be optionally fitted with anti-vibration mounting (P/N BC404501) making it suitable for use in vibration heavy environments.

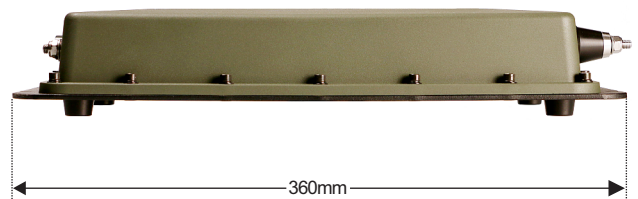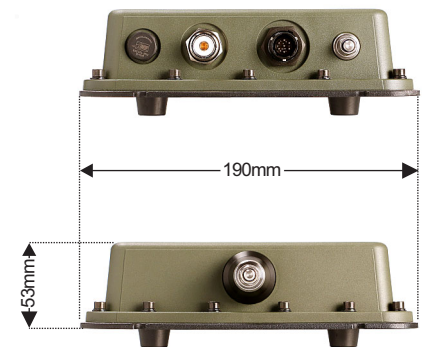

Anti-vibration mounting

Basic Configuration - PRC-4090 Mobile with composite HF whip

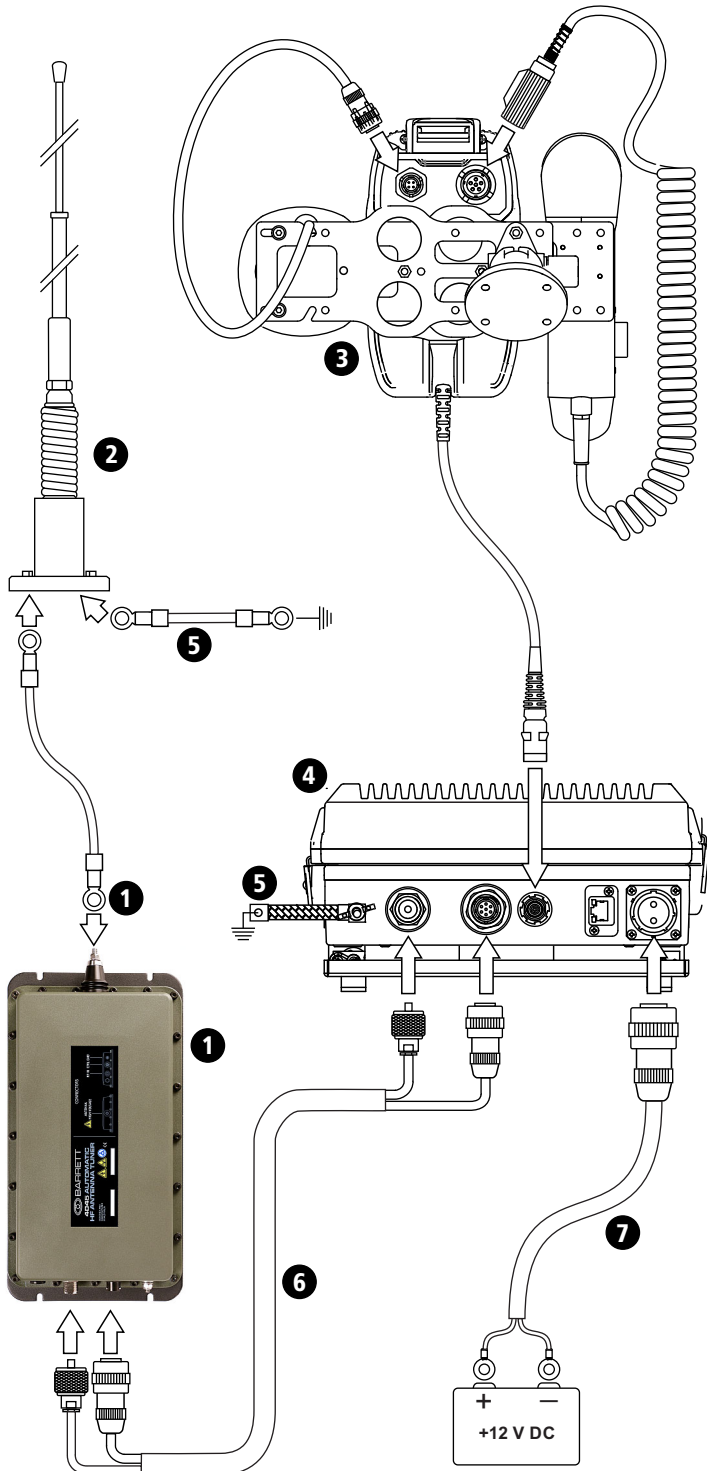

- 1 Barrett 4045 Automatic antenna tuner (P/N 4045-00-01 Nato green)
- 2 Military HF 2-30 MHz fibreglass whip antenna (P/N 2090-07-14) with Military HF antenna base (P/N 2090-07-15)
- 3 4090 Handset cradle docking station (P/N 4090-05-03)
- 4 PRC-4090 HF Tactical manpack transceiver (P/N 4090-00-01)
- 5 Ground (Earth)
- 6 Control cable 6 m - integral coaxial/control with connectors to suit 4000 series (P/N 4019-00-02)
- 7 DC Power cable and 12 V battery (P/N 4090-03-06)

4045 ATU - General Specifications

Frequency Range	1.5 - 30 MHz (continuous) with 10 m or longer longwire / marine whip 1.8 - 30 MHz (continuous) 7 m or longer longwire 2 - 30 MHz (continuous) with 3.5m or longer longwire / whip antenna
Input Impedance	50 Ω typically with <2:1 SWR
RF Input Power	150W PEP (Digital, voice and data)
Supply Voltage	12-13.8 V DC (derived from transceiver)
Power consumption	Tuned Typically 400mA
Tuning	<800mA
Tuning time	<1.5 seconds (typical) from memory - <100 mS (typical)
Memory addresses	Unlimited
Ingress Protection	Ip67
Protection	Open circuit antenna Short circuit antenna High VSWR Voltage transients
VSWR	<2:1 (typical)
Construction	Moulded Nylon-66 glass-filled with powder-coated stainless-steel base
Colour	NATO Green
Weight	3.2 kg

Specifications are typical. Equipment descriptions and specifications are subject to change without notice or obligation.

Head Office:

Barrett Communications Pty Ltd 47 Discovery Drive, Bibra Lake, WA, 6163 AUSTRALIA
Tel: +61 8 9434 1700
information@barrettcomms.com

www.barrettcomms.com

BCB40451/3

