

APX N70 XE

Single-band P25 portable two-way radio

Keeping firefighters safe, focused and always in touch

When lives are threatened, the APX N70 XE radio is the lifeline that keeps teams safe, focused, and in touch during critical moments. Made for firefighters and EMS personnel, it combines high tier adaptive audio with intuitive operation, advanced connectivity, and streamlined device management. Every element of the rugged, ergonomic design maximizes task performance in unpredictable situations.

Large controls are easily operated with gloves, and the 3" Corning® Gorilla® Glass touch screen provides access to critical information and apps. Adaptive audio and high dynamic range mics ensure clear communication in noisy environments.

The APX N70 XE offers Wi-Fi and optional LTE connectivity, keeping crew members in touch even outside regular P25 radio coverage. Optional smart apps and services enhance situational awareness and collaboration.

A superior ownership experience reduces the burden on radio managers, allowing rapid over-the-air provisioning and updates to their entire fleet of devices. This ensures secure, reliable operation while giving access to new apps and functions, without needing to take radios out of service for manual maintenance.



Features

OPERATION MODES

Digital Trunking: 9600 Baud APCO P25 phase 1, FDMA and phase 2 TDMA

Digital Conventional: APCO 25

Analog Trunking: 3600 Baud SmartNet®, SmartZone®, Omnilink®

Analog Conventional: MDC 1200

ASTRO® 25 Integrated Voice and Data

SmartConnect Multi-net Connectivity¹

FREQUENCY BANDS

7/800 MHz

Up to 3000 Channels

Up to 200 Zones¹

ADDITIONAL CONNECTIVITY

Bluetooth (Version 5.0)

Wi-Fi 802.11 a/b/g/n/ac, 2.4 and 5 GHz Bands

LTE¹

NFC (Near-Field Communications)²

AUDIO FEATURES

3 W Speaker with Adaptive Equalization

2 Internal HDR Microphone

Adaptive Dual-sided Operation

Adaptive Noise Suppression Intensity¹

Adaptive Gain Control¹

Adaptive Windporting¹

IMPRES™ Audio Accessory Compatibility

Noise Sensing Volume Control¹

Receive Volume Leveling¹

Intelligent Noise Reduction¹

MANAGEMENT

RadioCentral™

Radio Management (RM)

CPS (Customer Programming Software)

SmartProgramming¹

LOCATION-TRACKING

Built-in GNSS (GPS, Galileo and GLONASS)

SmartLocate and Indoor Positioning¹

SmartMapping¹

SECURITY

256-bit AES¹

Single-key ADP Encryption

Software Key

P25 Authentication¹

Multikey for up to 128 Keys and Multi-algorithm¹

Touchless Key Provisioning³

Over-The-Air Rekeying (OTAR)¹

Multi System Over The Air Rekeying (MS OTAR)

HAZLOC¹ (WHEN USED WITH DIV1 BATTERY)

Class I - Division 1 Groups C, D; Division 2 Groups A, B, C, D

Class II - Division 1 Groups E, F, G; Division 2 Groups F, G

Class III - Hazardous Locations

MESSAGING

Canned Messages

SmartMessaging¹

VOICE INTERACTION

Customizable Voice Announcements

ViQi Radio Actions with Intuitive Commands¹

ENERGY

Included HAZLOC rated,
UL Div 1 3650 mAh Battery

Optional 3200 mAh Battery

Optional High-cap 4400 mAh Battery

IMPRES 2 Smart Battery Technology

OTHER FEATURES

Radio Profiles

Enhanced Data¹

Multicast Voting Scan¹

Man Down/Fall Alert¹

DVRS PSU¹

Digital Tone Signaling¹

APX Personnel Accountability¹

Instant Recall

SENSORS

Ambient Light (Intelligent lighting)

Accelerometer x2 (Display Orientation, Man Down)

INGRESS PROTECTION

IP6x Dust

IPx8 submersion (2 m, 4 hr)

MIL-STD Delta-T, 512.X Procedure 1

USER INTERFACE

3.0" Corning® Gorilla® Glass touch screen:
360x600 TFT 24-bit Full Color Transflective Display

Capacitive Touch Technology: Usable with Gloves Up to 4 mm Thick, Resistant to False Actuation from Fresh or Saltwater, Snow, Ice, Dirt or Grease

High Velocity User Interface: Large Touch Targets, Shallow Menu Hierarchy, Home Screen Information at a Glance, Integrated Applications

1.2" Top Display: 200x112 TFT 18-bit Color Transflective Screen, 1 Line of Icons, 2 Lines of Text, 14 Characters per Line, 2 mm Toughened Glass Lens

PTT Button: 1.26 x 0.55 in (32 x 14 mm)

16-position Channel Selector

Angled Power/Volume Knob

Orange Emergency Button

3 Programmable Side Buttons (1-dot, 2-dot, purple)

Concentric 2-position Switch

ABC Zone Switch

ViQi Button (3-dot)

Display On/Off/Home Button

6 Programmable Buttons Under Display

DIMENSIONS

Radio with Standard Battery, no Antenna

Height: 6.3 in (159 mm)

Width: 2.4 in (60 mm)

Depth: 1.9 in (50 mm)

Weight: 20.9 oz (593g)

¹ Optional Feature

² Hardware-ready

³ Included with use of OTAR combined with RadioCentral
Feature list subject to change without notice





Also available
in black



ViQi button

HAZLOC rated,
UL Div 1 Battery



Antenna technology improves
comfort and wearability

Volume knob

3" Corning® Gorilla®
Glass touch

Exaggerated PTT

Programmable
buttons

Wake button


Programmable
buttons for one-
touch quick access



Top display

Emergency
Button



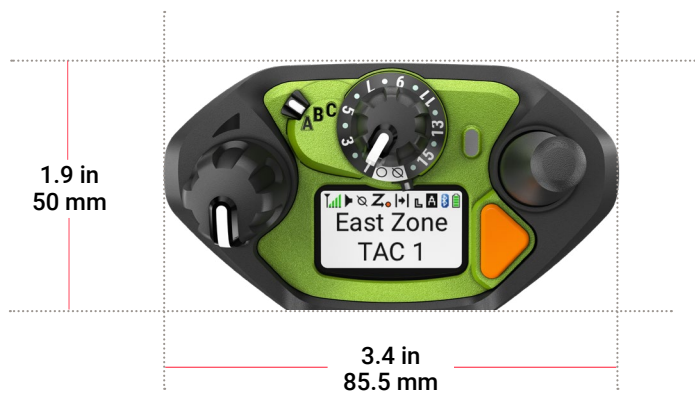



Performance

TRANSMITTER			
	NOTE	700 MHz	800 MHz
Frequency Range / Bandsplits	-	762-776, 792-806 MHz	806-825, 851-870 MHz
Channel Spacing	-	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz
Maximum Frequency Separation	-	Full Bandsplit	Full Bandsplit
Rated RF Output Power (Adjustable)	1	1-2.5 W	1-3 W
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	1	±1.0 ppm	±1.0 ppm
Modulation Limiting (12.5 / 20 / 25 kHz Channel)	1	±2.5 / ±4 / ±5 kHz	±2.5 / ±4 / ±5 kHz
Emissions (Conducted and Radiated)	1	-75 dBc	-75 dBc
Audio Response	1	+1, -3 dB	+1, -3 dB
FM Hum and Noise (12.5 / 25 kHz Channel)	-	-47 / -52 dB	-47 / -52 dB
Audio Distortion (12.5 / 25 kHz Channel)	1	1.00%	1.00%

RECEIVER			
	NOTE	700 MHz	800 MHz
Frequency Range / Bandsplits	-	762-776, 799-806 MHz	851-870 MHz
Channel Spacing	-	12.5 / 20 / 25 kHz	12.5 / 20 / 25 kHz
Maximum Frequency Separation	-	Full Bandsplit	Full Bandsplit
Audio Output Power at Rated	-	1 W / 3 W	1 W / 3 W
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	1	±1.0 ppm	±1.0 ppm
Analog Sensitivity (12 dB SINAD)	2	0.25 µV	0.25 µV
Digital Sensitivity (1% BER)	3	0.375 µV	0.375 µV
Digital Sensitivity (5% BER)	3	0.24 µV	0.24 µV
Selectivity (12.5 / 25 kHz Channel)	1	-61.3 / -75.2 dB	-61.3 / -75.2 dB
Intermodulation Rejection	-	80/78 dB	80 dB
Spurious Rejection	-	76.6 dB	76.6 dB
FM Hum and Noise (12.5 / 25 kHz Channel)	-	-51 / -55 dB	-51 / -55 dB
Audio Distortion	-	1.00%	1.00%



IMPRES™ 2 BATTERIES				
	FOOTNOTE	PART NO	CAPACITY	AVAILABILITY
HAZLOC rated, UL Div 1 (TIA 4950-A)	4	PMNN4818	3650mAh	Included
Standard	-	PMNN4816	3200mAh	Optional
High Capacity	-	PMNN4817	4400mAh	Optional

ENCRYPTION	
Supported Encryption Algorithms	ADP, AES-256, DES, DES-XL, DES-OFB, DVP-XL, Localized Algorithm
Encryption Algorithm Capacity	8
Encryption Keys per Radio	1024 Keys, Programmable for 64 Common Key References (CKR) , upgradable to 128 CKRs, or 16 Physical Identifiers (PID)
Encryption Keying	Local Key Loader and Over-the-Air Rekeying (OTAR)
Synchronization	XL - Counter Addressing, OFB - Output Feedback
Vector Generator	NIST-Approved Random Number Generator
Encryption Type	Digital and SecureNet, TLS1.2, SRTP
Key Storage	Tamper-protected Volatile or Non-volatile Memory
Key Erasure	Keyboard Command and Tamper Detection
Standards	FIPS 140-3 Level 1 and Level 3, FIPS 197
Device Certificates	x.509v3 ECC-P384, x.509v3 RSA-2048
Cipher Suites FIPS 140-2 Level 1	ECDHE_ECDSA_WITH_AES256_GCM_SHA384 TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA TLS_RSA_WITH_AES_256_GCM_SHA384 SRTP_AEAD_AES_256_GCM1

LOCATION TRACKING		
	FOOTNOTE	
Constellations	-	GPS, GLONASS and Galileo
Tracking Sensitivity	-	-159 dBm
Accuracy	5	<5m (95%)
Cold Start	5	<60 Seconds (95%)
Hot Start	5	<5 Seconds (95%)
Mode	-	Autonomous (Assisted Only)

WIRELESS		
LTE	FOOTNOTE	
Bands Supported	-	2, 4, 12, 13, 14, 17
Device Category	-	4
Certifications	6	FirstNet®, Verizon®, Bell Mobility
WIFI		
Standards Supported	-	802.11a/ b/g/n/ac
Frequency Range	-	2400-2472, 5180-5825 MHz
Security	-	Supports WPA-2, WPA, WEP
Capacity	-	Up to 20 SSIDs
BLUETOOTH		
Version	-	5.0
Frequency Range	-	2402 - 2480 MHz
Security	-	128-bit AES-CCM Encryption

AUDIO		
	STANDARD	UPGRADE
Audio Output Power at Rated	1 W	3 W
Audio Output Power at Max	3 W	5 W
Audio Response (EIA)	+1, -3 dB	+1, -3 dB
Speech Loudness at 12 in (300 mm)	102 phon	105 Phon
Audio Features	Adaptive Dual-sided Operation Adaptive Equalization Adaptive Gain Control IMPRES Audio	Adaptive Noise Suppression Intensity
		Adaptive Windporting
		Noise Sensing Volume Control
		Receiving Volume Leveling
		Intelligent Noise Reduction





Environmental and Regulatory

MIL-STD 810										
	MIL-STD 810C		MIL-STD 810D		MIL-STD 810E		MIL-STD 810F		MIL-STD 810G/H	
	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.	Method	Proc./Cat.
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	II	500.5	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.5	I/A1, II/A1
Low Temperature	502.1	I	502.2	I/C3, II/C1	502.3	I/C3, II/C1	502.4	I/C3, II/C1	502.5	I/C3, II/C1
Temperature Shock	503.1	I	503.2	I/A1, C3	503.3	I/A1, C3	503.4	I	503.5	I/C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I/A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.5	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	1 Proc	507.5	II/ Aggravated
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	1 Proc	509.5	1 Proc
Blowing Dust	510.1	I	510.2	I	510.3	I	510.4	I	510.5	I
Blowing Sand	1 Proc	1 Proc	510.2	II	510.3	II	510.4	II	510.5	II
Submersion	512.1	I	512.2	I	512.3	I	512.4	I	512.5	I
Vibration	514.2	VIII/F, Curve-W	514.3	I/10, II/3	514.4	I/10, II/3	514.5	I/24	514.6	I/24
Shock	516.2	I, III, V	516.3	I, V, VI	516.4	I, V, VI	516.5	I, V, VI	516.6	I, V, VI
Shock (Drop)	516.2	II	516.3	IV	516.4	IV	516.5	IV	516.6	IV



ENVIRONMENTAL		
FOOTNOTE		
Operating Temperature	6	-30 to +60 °C (-22 to +140 °F)
Storage Temperature	6	-40 to +85 °C (-40 to +185 °F)
Humidity	-	Per MIL-STD 810
ESD	-	IEC 61000-4-2
Dust Resistance	-	IP6X
Water Resistance (Submersion)	-	IPX8 (2 meters, 4 hours) MIL-STD Delta-T, 512.X Procedure 1

REGULATORY			
	MODEL NUMBER	FCC ID	IC ID
7/800 MHZ	H35UCT9PW8AN	AZ489FT7147	109U-89FT7147
LMR		8K10F1D, 8K10F1E, 8K10F1W, 11K0F3E, 16K0F3E, 20K0F1E	
Bluetooth		1M18G1D, 1M1F1D, 2M1F1D	
WiFi		12M9G1D, 16M7D1D, 17M9D1D, 36M2D1D, 17M5D1D, 18M4D1D, 36M8D1D, 76M1D1D	
LTE		Band 2 (1850.7 - 1910 MHz), Modulation: *G7D, *D7W Band 4 (1710.7 - 1755 MHz), Modulation: *G7D, *D7W Band 12 (699.7 - 716 MHz), Modulation: *G7D, *D7W Band 13: (777-787 MHz), Modulation *G7D, D7W Band 14 (788 - 798 MHz), Modulation: *G7D, *D7W Band 17 (704 - 716 MHz), Modulation: *G7D, *D7W	

¹ Measured in the analog mode per TIA / EIA 603 under nominal conditions.

Selectivity reflects newer 2-tone test method as defined in revision D TIA603-D issued in 2010.

² Measured conductively in analog mode per TIA / EIA 603 under nominal conditions.

³ Measured conductively in digital mode per TIA / EIA IS 102.CAAA under nominal conditions.

⁴ Listed by UL to the standards ANSI/TIA 4950-A and CAN/CSA C22.2 NO. 157-92 Classification Rating: Class I, Division 1, Groups C, D; Class II, Division 1, Group E, F, G; Class III, Hazardous (Classified) Locations. ANSI/ISA 12.12.01-2015 and CAN/CSA C22.2 No. 213-15; Class I, Division 2, Groups A, B, C, D; T3C

⁵ Measured conductively with >6 satellites visible at a nominal -130 dBm signal strength. Specs provided are 95th percentile values.

⁶ LMR only. Front display, LTE, WiFi, Bluetooth and GPS not available when radio internal temperature is below -20 °C (-4 °F). HAZLOC rated, UL Div 1, TIA 4950-A or Hi capacity battery required for operation between -20 °C (-4 °F) and -30 °C (-22 °F). Batteries should be charged at 0 to +45 °C (+32 to +113 °F) and stored at +20 to +25 °C (+68 to +77 °F)

All specifications shown are typical. Specifications are subject to change without notice.

To learn more, visit: www.motorolasolutions.com/apxn70xe



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. motorolasolutions.com

This device is only available in North America.

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. ©2025 Motorola Solutions, Inc. All rights reserved. 08-2025 [RDS06]