



# DVR-LX P25 SUITCASE REPEATER

Two-way radio communications at a remote incident can be a challenge. But the DVR-LX Suitcase Repeater is a rapid deployment repeater designed to bring two-way portable radio coverage to a critical incident, command post, or special event. It is an ideal solution to keep public safety and federal government agencies connected.

The Futurecom DVR-LX Suitcase Repeater consists of a vehicular repeater (DVR-LX), filters and a power supply installed in a protective carrying case. Mounting space is provided to add remote mount APX™ mobile radios of your choice. The suitcase can be powered from a 12 VDC, 120 VAC or 220 VAC supply.

## KEY FEATURES AND BENEFITS

- Programmable output power: 1-10 W
- Available in VHF, UHF, 700 MHz and 800 MHz bands
- Authentication (optional)
- Remote update via Radio Management (optional)
- Extends key P25 trunking features to 'DVRs Enabled' portable radio users including APX 6000, APX 8000 and APX NEXT® radios
  - Portable push-to-talk and emergency ID pass-through
  - Go ahead and deny tones
  - Out-of-range and fall-back tones
- P25 digital/ analog operation
- Full duplex or simplex operation
- In-band or cross-band configurations
- Integrates with remote mount APX 8500, APX 7500, APX 6500 and APX 5500 mobile radios
- Operated through mobile radio control head
- Standard suitcase color: orange and black
- Optional colors available: desert tan, yellow, silver
- Made of ultra-high impact structural copolymer polypropylene with solid wall design, to meet the most demanding environments
- Sold exclusively through Motorola Solutions



**MOTOROLA SOLUTIONS**

**FUTURECOM**  
SYSTEMS GROUP, ULC

## GENERAL SPECIFICATIONS

Dimensions: Height x Width x Depth, Weight	525 x 435 x 220 mm (20.6 x 17.0 x 8.6 in), 22.7 kg (50 lb)
Channel Spacing	12.5 or 25 kHz programmable (25 kHz operation not available in USA)
Number of Channels	192
CTCSS/DCS	Programmable per channel
Power Supply	AC: 120 V or 220 V, DC: 13.8 V $\pm$ 20%, negative ground only
Current Drain: 117 V AC	Standby Receive: 0.5 A Transmit: 2.8 A
Current Drain: 13.8 V DC	Standby Receive: 1.6 A Transmit: 14.5 A
Operating Temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Antenna Impedance	50 ohms
Duty Cycle	Continuous (DVR)
<b>EXTERNAL CONNECTORS</b>	
Antenna	N Female
Computer Interface	USB
Power Supply	AC-MS3102E14-7P; DC-MS3102E16-11P



## EQUIPMENT TYPE ACCEPTANCE

	VHF	UHF	700 MHz	800 MHz
FCC	136-174 MHz L06-DVRSVHF	380-406 MHz 406.1-512 MHz L06-DVRSUHF	764-776 MHz 794 -806 MHz L06-DVRS700	806-824 MHz 851-869 MHz L06-DVRS800
Industry Canada	138-174 MHz 2098B-DVRSVHF	406.1-430MHz 450-470MHz 2098B-DVRSUHF	768-776 MHz 798-806 MHz 2098B-DVRS700	806-824 MHz 851-869 MHz 2098B-DVRS800

## TRANSMITTER SPECIFICATIONS

	VHF	UHF	700 MHz	800 MHz
Frequency Band	136-174 MHz	380-430 MHz 450-470 MHz	764-776 MHz	851-869 MHz
Power Output @ Antenna Port <sup>1</sup>	10 W (programmable per channel from 1 W to 10 W)			
CTC Option	15 sec to 15 min or Disabled			
Max Spurious Output	-20 dBm			
Frequency Stability	$\pm$ 1.5 ppm			
FM Hum and Noise (12.5 / 25 kHz)	-37 dB/ -43 dB			
Audio Response	+1, -3 dB of 6 dB / octave pre-emphasis characteristic over 300 Hz to 3 kHz			
Audio Distortion	<2%			

## RECEIVER SPECIFICATIONS

	VHF	UHF	700 MHz	800 MHz
Frequency Band	136-174 MHz	380-430 MHz 450-470 MHz	794-806 MHz 764-776 MHz	806-824 MHz 851-869 MHz
Receiver Sensitivity (simplex/duplex)	Analog 12dB SINA -115 dbm		Digital P25 5% BER -115 dbm	
Frequency Stability (-30 °C to +60 °C; +25 °C Ref.)	±1.5 ppm			
Selectivity 12.5 / 25 kHz	-60 dB/ -75 dB			
Intermodulation	-70 dB			
Deviation 12.5 / 25 kHz	±2.5 kHz / ±5 kHz			
FM Hum and Noise 12.5 / 25 kHz	-37 dB/ -43 dB			
Audio Output (Repeater Detect Audio)	600 mV RMS nominal, flat response			
Audio Response	-1, -3 dB of 6 dB/ octave de-emphasis characteristic over 300 Hz to 3 kHz			
Audio Distortion	<2%			

1. Power Output values reflect results at nominal conditions and do not include duplexer losses.

## OPTIONAL BATTERY PACK AND CHARGER FOR TRANSPORTABLE DVRS SPECIFICATIONS

Backup Time For DVR-LX  
(50:50 Duty Cycle, New Batteries)

2 hrs

### DIMENSIONS HEIGHT x WIDTH x DEPTH

Battery Pack 245 x 280 x 175 mm (9.7 x 11.0 x 4.9 in)

Battery Charger 50 x 130 x 125 mm (2.0 x 5.1 x 5.0 in)

### WEIGHT

Battery Pack 13.0 kg (28.5 lb)

Battery Charger 1.8 kg (4.0 lb)

Battery Charger  
Input Voltage 100-132 V AC, 50-60 Hz or  
220 V AC, 50-60 Hz

Battery Pack Output  
Voltage Range 10.9 V DC - 13.8 V DC

Charging Temperature +20 °C to +25 °C (+68 °F to +77 °F)

Operating Temperature -15 °C to +50 °C (+5 °F to +122 °F)

Storage Temperature +25 °C (+77 °F)

Charger Output DC Fuse  
(Reverse DC Polarity Protection) 7.5 A, Automotive Blade Type, Fast Blow

Charger Compliance CSA C22.2, UL 1236

Charger DC Plug Compliance MIL-C-5015

### CONNECTORS

Battery Pack DC Output CA3102E16-11SB,  
MIL-C-5015 Bayonet

Charger AC Input NEMA 5-15P Three Prong AC Plug


Charger DC Output CA3106E16-11 PB,  
MIL-C-5015 Bayonet

Charging Time 10 hrs approx.


Float Charge Required



Note: Specifications are subject to change without notice

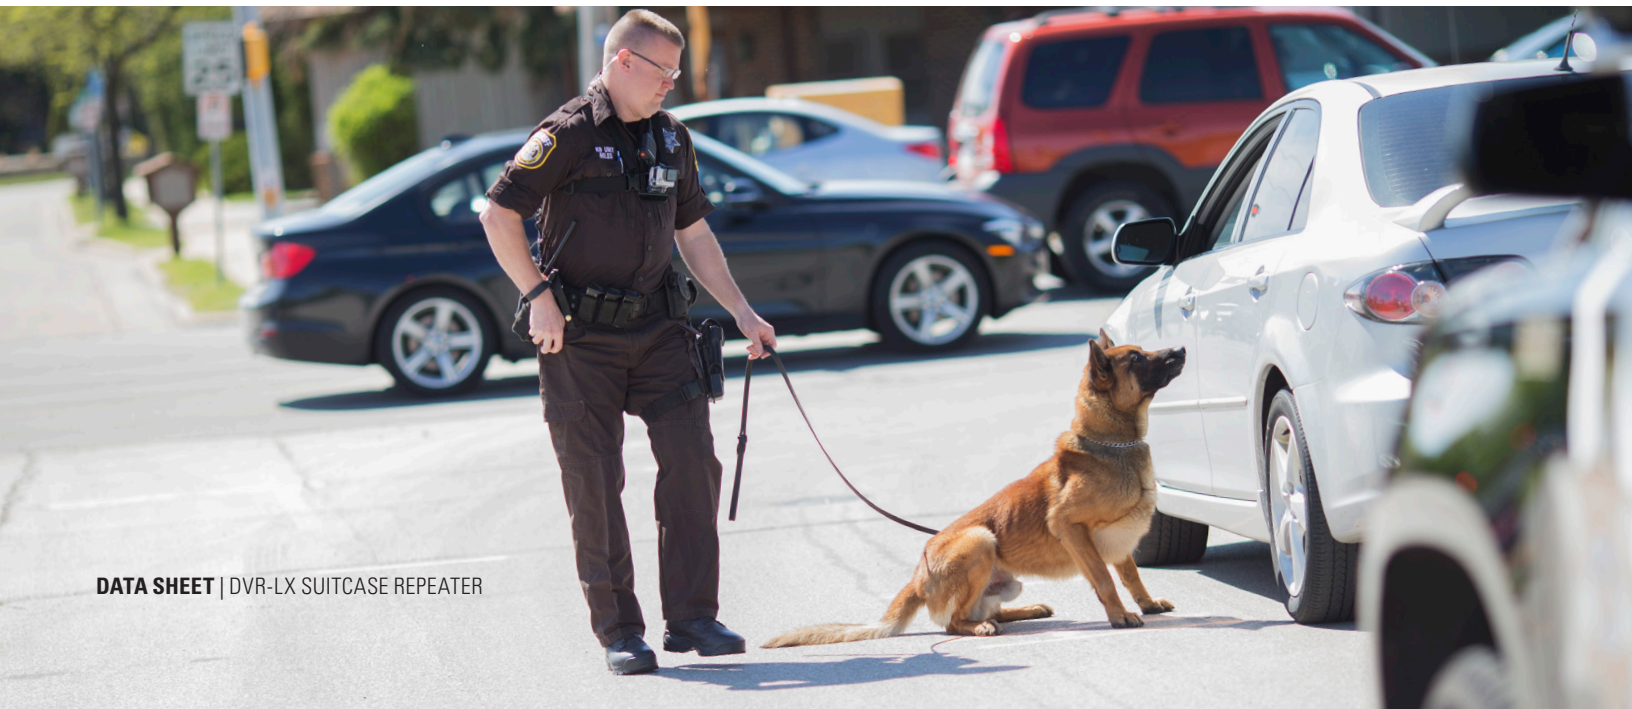

## DVR-LX Suitcase Repeater facilitates communications to portable radios

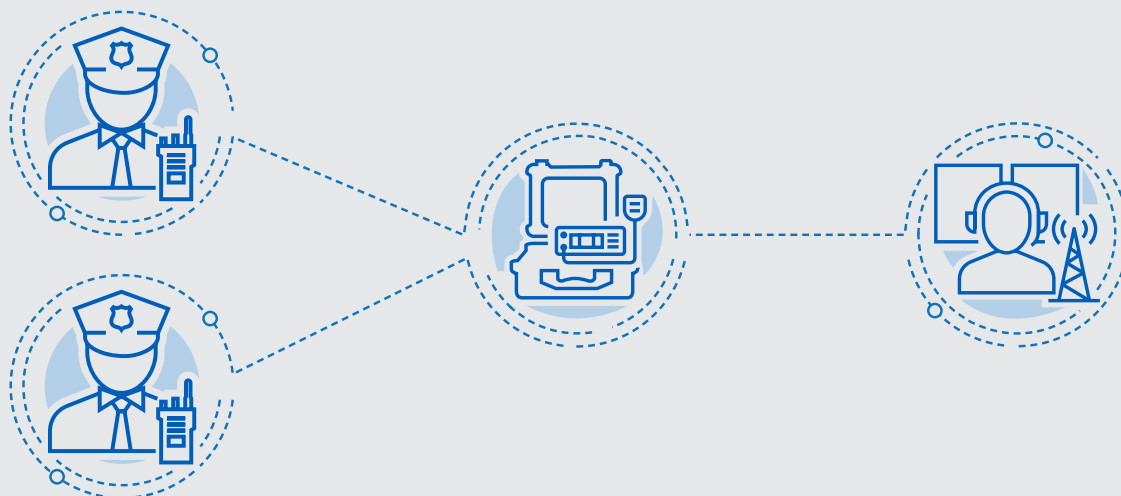

Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. [motorolasolutions.com](https://www.motorolasolutions.com)

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. Futurecom, PDR8000, the Futurecom Logo and the Stylized FC logo are registered trademarks of Futurecom Systems Group, ULC. All other trademarks are the property of their respective owners. © 2020 Motorola Solutions, Inc. All rights reserved. 10-2020

