

MTX850•LS and MTX8250•LS Accessories

The wide range of Motorola Original accessories available for your MTX850•LS and MTX8250•LS radios makes it easy to expand and customize their capabilities to fit your business requirements.

AUDIO ACCESSORIES

Headsets in various styles give your MTX850•LS or MTX8250•LS radio enhanced sound clarity—especially useful in noisy environments. **Remote speaker microphones** let you use your radio without lifting it out of its carry case. **Comfortable earpieces** mute the radio speaker and channel the audio directly to your ear, particularly useful when privacy is important.



BATTERIES AND CHARGERS

Motorola **high- or ultra-high-capacity batteries** boost the performance time of your MTX850•LS or MTX8250•LS radio to help ensure that it's ready whenever you need it. **Compact lithium ion batteries** are ideal for users who prefer a slimmer, lighter radio, and spark-free **Factory Mutual Approved batteries** are available for use in higher-risk environments. **Single and six-unit chargers** can charge spare batteries in one to three hours, minimizing radio down time.



CARRY CASES AND BELT CLIPS

Handy leather or nylon carry cases and belt clips are designed to help protect your MTX850•LS or MTX8250•LS radio and hold it snugly in place, making it easy and comfortable to carry.



VOICE STORAGE OPTION BOARD

This unique option board lets you store incoming calls or personal reminders on your radio.

MTX850•LS and MTX8250•LS Specifications

GENERAL SPECIFICATIONS

| | 800 MHz | MTX850•LS | MTX8250•LS |
|---|--|-------------------|---------------|
| Channel Capacity | | | |
| Trunking zone capacity: | | 1 | 15 |
| Trunking talkgroup capacity: | | 16* | 16 (per zone) |
| Conventional channel capacity: | | 16* | 128 |
| Power Supply | | | |
| Rechargeable battery | 7.5V | | |
| Dimensions | | | |
| With NiMH High Capacity Battery | 5.40" x 2.26" x 1.50" (137.0 x 57.5 x 37.5 mm) | | |
| With NiMH Ultra-High Capacity Battery | 5.40" x 2.26" x 1.60" (137.0 x 57.5 x 40.0 mm) | | |
| With NiCd Battery | 5.40" x 2.26" x 1.60" (137.0 x 57.5 x 40.0 mm) | | |
| With Lilon Battery | 5.40" x 2.26" x 1.30" (137.0 x 57.5 x 33.0 mm) | | |
| Weight | | | |
| With NiMH High Capacity Battery | 15.0 oz. (420g) | | |
| With NiMH Ultra-High Capacity Battery | 17.5 oz. (500g) | | |
| With NiCd Battery | 15.8 oz. (450g) | | |
| With Lilon Battery | 12.5 oz. (350g) | | |
| Average Battery Life @ 5/5/90 Duty Cycle | Low Power | High Power | |
| With NiMH High Capacity Battery | 9 hrs | 8 hrs | |
| With NiMH Ultra-High Capacity Battery | 14 hrs | 11 hrs | |
| With NiCd Battery | 9 hrs | 8 hrs | |
| With Lilon Battery | 9 hrs | 8 hrs | |

* Trunking talkgroups and conventional channels combined cannot exceed 16

TRANSMITTER SPECIFICATIONS

| Specifications | 800 MHz |
|---|-------------------------|
| Frequency Range** | |
| Transmit | 806 - 821 MHz |
| Talkaround | 851 - 866 MHz |
| Power Output | |
| | 2.5 W (806 - 821 MHz) |
| | 2 W (851 - 866 MHz) |
| Frequency Stability (-30° C to +60° C, +25° Ref.) | ± 2.5 ppm |
| Modulation Limiting | ± 5 KHz @ 806 - 821 MHz |
| Emission (Conducted & Radiated) | -13 dBm per FCC |
| Channel Spacing | 25 KHz |
| FM Hum & Noise (Companion Receiver) | -40 dB |
| Audio Response (from 6dB/octave pre-emphasis, 300-3000 Hz) | +1 to -3 dB |
| Audio Distortion | 3% |
| FM Modulation | 16K0F3E |

** Note: This equipment is not authorized by the FCC for public safety use in the 821-825 / 866 - 870 MHz band in the United States

FOR MORE INFORMATION CONTACT:

RECEIVER SPECIFICATIONS

| Specifications | 800 MHz |
|--|---------------|
| Frequency Range | 851 - 866 MHz |
| Hum and Noise | -45dB |
| Sensitivity (12 dB SINAD) EIA | .35 µV |
| Channel Spacing | 25 KHz |
| Intermodulation | -70 dB |
| Adjacent Channel Selectivity | -70 dB |
| Spurious Rejection | -70 dB |
| Rated Audio | 0.5 W |
| Audio Distortion @ Rated Audio | 3% typical |
| Audio Response (from 6dB/octave de-emphasis, 300-3000 Hz) | +1 to -3 dB |
| Conducted Spurious Emission | -57 dBm |

PORTABLE MILITARY STANDARDS 810 C, D, & E

| Applicable MIL-STD | 810C Methods | 810C Procedures | 810D Methods | 810E Methods | 810D/810E Procedures |
|--------------------|--------------|-----------------|--------------|--------------|----------------------|
| Low Pressure | 500.1 | 1 | 500.2 | 500.3 | 2 |
| High Temperature | 501.1 | 1,2 | 501.2 | 501.3 | 1,2 |
| Low Temperature | 502.1 | 2 | 502.2 | 502.3 | 1,2 |
| Temperature Shock | 503.1 | 1 | 503.2 | 503.3 | 1 |
| Solar Radiation | 505.1 | 1 | 505.2 | 505.3 | 1 |
| Rain | 506.1 | 1,2 | 506.2 | 506.3 | 1,2 |
| Humidity | 507.1 | 2 | 507.2 | 507.3 | 2,3 |
| Salt Fog | 509.1 | 1 | 509.2 | 509.3 | 1 |
| Dust | 510.1 | 1 | 510.2 | 510.3 | 1 |
| Vibration | 514.2 | 8,10 | 514.3 | 514.4 | 1 |
| Shock | 516.2 | 1,2,5 | 516.3 | 516.4 | 1,4 |

ENVIRONMENTAL SPECIFICATIONS

| | |
|------------------------------|----------------|
| Operating Temperature | -30 to +60° C |
| Storage Temperature | -55 to +85° C |
| Humidity | 95% RH @ 8 Hr. |
| ESD | IEC 801-2 KV |
| Water Intrusion | IP54 |

FACTORY MUTUAL APPROVALS

Factory Mutual has given the MTX850•LS and MTX8250•LS an intrinsically safe rating for use in classes I, II, III, Division 1, Groups C,D,E,F and G, as well as non-incendive use in Class 1, Division 2, Groups A, B, C and D on models ordered with the Factory Mutual option.



Motorola, the stylized M logo, Professional Radio—As Dedicated As You Are, LS Quality Seal, and X-Pand are trademarks of Motorola, Inc. © Reg. U.S. Patent & Trademark Office. All other product or service names are the property of their respective owners. Specifications are subject to change without notice. © 2000 Motorola, Inc. All rights reserved. Printed in the U.S.A.

<http://www.motorola.com>

MD-MTX207



reliable

flexible

powerful

MTX850•LS™
MTX8250•LS™
Two-Way Radios



MTX Series
Professional Radio
For LTR® Systems

As Dedicated As You Are™

Professional Radio



When you're completing a complicated repair job, the MTX850•LS and MTX8250•LS radios deliver the communication you need to take care of business—quickly and effectively.

Motorola Two-Way Radio: Communication You Can Count On

Success in today's business world depends on exceptional performance. To stay ahead, you have to make every minute count—and every dollar. You also need fast, dependable access to the right people and information so you can get the job done. And that's exactly what two-way radio delivers. Efficient two-way radio helps you stay connected so you can maximize productivity and meet your customers' demands. By simply pressing a button, you can talk with one, one dozen, or one hundred people instantly. And when you choose a Motorola Professional Radio, you know you're getting a product specifically designed to meet your needs as a professional—a product that's As Dedicated As You Are™.

Intelligent Radio

So advanced, it practically thinks for you.

MTX850•LS and MTX8250•LS: The Smart Choice for Your Business

POWERFUL

The innovative Motorola MTX850•LS and MTX8250•LS portable two-way radios deliver everything you need for great business communication. These radios can help enhance your interactive resources by operating effectively on 800 MHz LTR® systems. Powerful, cost-effective LTR trunking provides a wider calling range, faster channel access, greater privacy, and higher user and talkgroup capacity—which means your MTX850•LS and MTX8250•LS radios have what it takes to help you stay in touch and on top.

FLEXIBLE

Both radios offer remarkable ease of use and unsurpassed functionality at the touch of a button:

- **Signaling features such as selective call and call alert** let you control your communication with extraordinary precision
- **Selectable scanning capabilities** give you the flexibility to program your MTX850•LS and MTX8250•LS radios to scan only the transmissions you want to hear
- **Voice storage capabilities** allow you to record incoming calls or personal messages
- **X-Pand™ audio enhancement** on the MTX8250•LS radio can reduce background noise and improve sound quality

- **User-friendly icons** on the large 14-character alphanumeric display provide at-a-glance understanding of the radios' features and commands
- **Easy reprogramming capabilities** help ensure that these radios will keep serving you effectively as your business grows and changes

RELIABLE

For more than 65 years, Motorola has been a leader in creating state-of-the-art wireless communications for people like you. Each MTX850•LS and MTX8250•LS radio is backed by a limited two-year* warranty on parts and labor. So when you select the MTX850•LS or MTX8250•LS two-way radio, you know you'll experience the same superior quality you've come to expect from all Motorola products.

Making wise decisions is nothing new to you. So don't wait to make your next smart move. Contact your local Motorola representative today about the MTX850•LS and MTX8250•LS radios—and put the power of intelligent radio to work for your business.

*Radio accessories are covered by Motorola's one-year accessories warranty.

MTX850•LS

**1 Trunked Zone (with 16 talkgroups)
Up to 16 Conventional Channels**

Emergency Button

Sounds an alarm in emergencies or can be programmed for specific features

MDC1200 Signaling (Receive) Features on LTR® Zones

- **Selective Call**—Lets you receive calls from a specific group or individual
- **Call Alert**—Notifies unavailable users that someone is trying to reach them

X-Pand Audio Enhancement

Crisper, clearer audio quality

System/All Group/ Auto Group Scanning

Define the frequency and type of transmissions your radio scans

Telephone Interconnect Capability

Receive phone calls using the radio

4 Programmable Buttons

Immediate access to your favorite features

Conventional Talkaround

Unit-to-unit communications, bypassing the repeater

Small, lightweight, and durable

Voice storage capabilities (with option board)

In addition to all the MTX850•LS model features, the MTX8250•LS model offers:

**15 Trunked Zones (16 talkgroups each)
128 Conventional Channels**

Battery Gauge

For at-a-glance battery life levels

14-Character Alphanumeric Display with User-Friendly Icons

Identifies trunked zones, talkgroups, and conventional channels

Control Buttons

Easy management of menu, navigation, and exit functions

MDC1200 Signaling (Send/Receive) Features on Conventional and LTR® Zones

- **Caller ID**—Identifies incoming callers
- **Selective Call**—Lets you send calls to and receive calls from a specific group or individual
- **Call Alert**—Informs unavailable users that you're trying to reach them
- **Radio Check**—Notifies you whether another user's radio is activated
- **Emergency (send only)**—Sounds an alarm or alerts dispatcher in urgent situations

Quick Call II™ on Conventional Zones

Send and receive information via tone or digital signals

Front Panel Programmable Phone List

Store and retrieve your favorite phone numbers

Telephone Interconnect Capability

Place and receive phone calls using the radio

7 Programmable Buttons


Immediate access to your favorite features

Home Channel Revert

Automatic, one-button return to a preferred channel

User-Defined Lists

Change scan, phone, and call lists on the fly

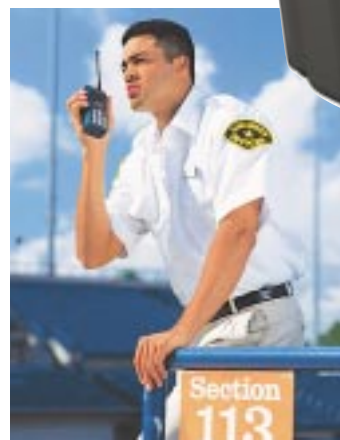

Fast, efficient communication can be crucial when you're overseeing security. The MTX850•LS and MTX8250•LS radios offer exactly what you need to stay in touch—anywhere, anytime.

On a construction site, you need to ensure workers have the right equipment at the right time. The MTX850•LS and MTX8250•LS two-way radios give you the power you need to get the job done.

