

VT100 14-PORT DOCK

The fastest way to host multiple VT100 cameras for simultaneous rapid charging, configuration and video downloading.



GENERAL INFORMATION

Product Code VT-100-DOCK14/AUS, VT-100-DOCK14/UK,
VT-100-DOCK14/EU, VT-100-DOCK14/US,
VT-100-DOCK14/ROW

Hosts Multiple VT100s 14 VT100 camera ports

Scalability Up to six 14-Port Docks can be connected
to a DockController

Compatibility Compatible with DockController DC-200

Easy To Deploy Connection is a single USB to the
DockController, and a mains adaptor for power
(USB cable supplied)

Eliminates need for separate wiring
to each camera

Speedy Plug-in/Pull-out
Connectivity VT100s can be easily docked or undocked for
speedy use

Flexible for use with camera accessories
attached

Flexible Docking Can be securely fastened to a shelf
or other mounting surface - can be secured
at an angle

Warranty 1 year manufacturer's warranty

Extended warranty available

SIZE AND WEIGHT

Dimensions 200mm x 38mm x 436mm

Weight 2.2kg (3.5kg boxed)

CHARGING, POWER AND INTERFACE

Charging Up to 5hrs from a fully flat VT100 battery


Power Requirement 12V/5A PSU, input 100-240V (PSU supplied)

Interface USB 2.0 compatible
USB 3.0 compatible

Operating Temperature 0° to 40°C (32° to 104°F)

Storage Temperature -55° to 70°C (-67° to 158°F)

View From Front

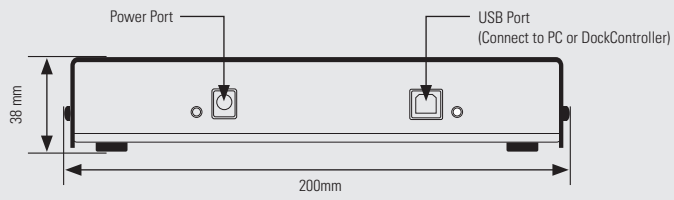

View From Side



View From Above



View From Below



For more information, please visit: www.motorolasolutions.com/BWC

Motorola Solutions Australia Pty Ltd

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.
© 2022 Motorola Solutions, Inc. All rights reserved. 02-2022 [LD10]